


## Vitrum II DIN Shutters and Curtains Control Wireless

cod. 01D020030

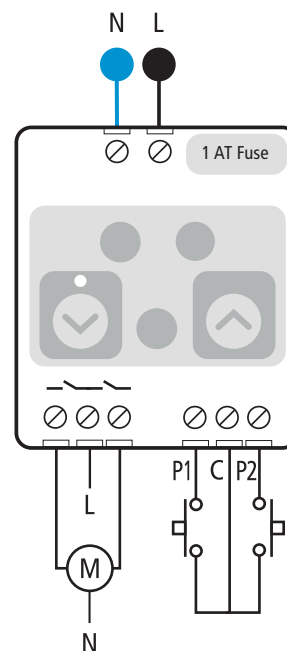

### FUNCTIONAL SPECIFICATION

- Two-button for control of roll down shutters and curtains
- Functionality indicated by 2 colored led  
OFF: blue color  
ON: yellow color
- Two service button for functionality test

### COMMAND MODE

- Remotely through association with other Vitrum Satellite for Shutters and Curtains
- Locally using button on cover

### MECHANICAL CHARACTERISTICS

- Plastic Box PC/ABS – 4 modules DIN
- DIN rail mounting
- Depth at sight 62 mm
- Dimension 92 x 75mm
- Weight: 230 g

### ELECTRICAL CHARACTERISTICS

- Power: 240Vac – 50Hz
- Energy consumption: < 1 W
- Operative temperature: -10 / +45°C
- Relative humidity : 20% / 90%
- Storage temperature: -40 / +55°C
- Storage Relative humidity : 20% / 90%
- Max load: 3A
- Wireless Z-wave Protocol
- Frequency of communication: F.M. 868.4MHz - R.F radiated power < 1mW
- R.F. Range: 20 m. MAX (open field)

Compliant with:

**B.T.:** 2006/95/CE

**E.M.C.:** 2004/108/CE

**R&TTE:** 1999/5/CE